


## Radio C1

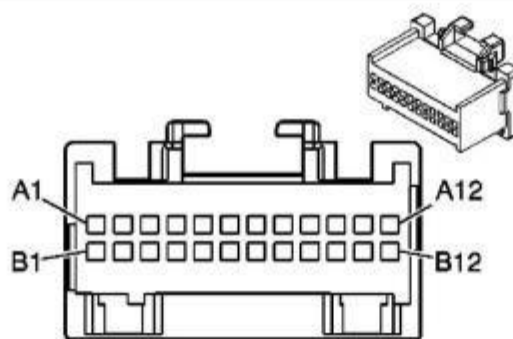

### Connector Part Information


• **OEM: 12110206**

• **24-Way F Micro-Pack 100 Series (L-BU)**


Pin	Wire Color	Circuit No.	Function
A1	GY	118	Left Front Speaker Signal (-) (1) (U1C)
A1	D-GN	1947	Left Front Low Level Audio (-) (US8)
A2	TN	201	Left Front Speaker (+) (1) (U1C)
A2	TN	511	Left Front Low Level Audio Signal (US8)
A3	L-BU	115	Right Rear Speaker Signal (-) (U1C)
A3	TN	1946	Right Rear Low Level Audio (-) (US8)
A4	D-BU	46	Right Rear Speaker (+) (U1C)
A4	D-BU	546	Right Rear Low Level Audio Signal (US8)
A5	BN	199	Left Rear Speaker (+) (U1C)
A5	BN/WH	599	Left Rear Low Level Audio Signal (US8)
A6	YE	116	Left Rear Speaker Signal (-) (U1C)
A6	BN	1999	Left Rear Low Level Audio (-) (US8)
A7	L-GN	200	Right Front Speaker (+) (1) (U1C)
A7	L-GN/WH	512	Right Front Low Level Audio Signal (US8)
A8	D-GN	117	Right Front Speaker Signal (-) (1) (U1C)
A8	L-GN	1948	Right Front Low Level Audio (-) (US8)
A9	D-BU	1796	Steering Column Radio Control Signal (UK3)
A10	WH/BK	644	10-Volt Reference (US8)
A11	--	--	Not Used
A12	BK/WH	1051	Signal Ground
B1	RD/WH	1140	Battery Positive Voltage
B2	--	--	Not Used
B3	L-GN	1011	Remote Radio Control Signal (US8)
B4-B5	--	--	Not Used
B6	PK	314	Radio On Signal
B7-B8	--	--	Not Used
B9	D-GN	5060	Low Speed GMLAN Serial Data
B10-B12	--	--	Not Used

Components	
Car Radio Battery Constant 12V+ Wire	Orange
Car Radio Accessory Switched 12V+ Wire	Yellow
Car Radio Ground Wire	Black
Car Radio Illumination Wire	
Car Radio Dimmer Wire	
Left Front Speaker Positive Wire (+)	
Left Front Speaker Negative Wire (-)	Grey
Right Front Speaker Positive Wire (+)	
Right Front Speaker Negative Wire (-)	Grey
Left Rear Speaker Positive Wire (+)	Brown
Left Rear Speaker Negative Wire (-)	Yellow
Right Rear Speaker Positive Wire (+)	
Right Rear Speaker Negative Wire (-)	

# REAR VIEW AND CONNECTORS

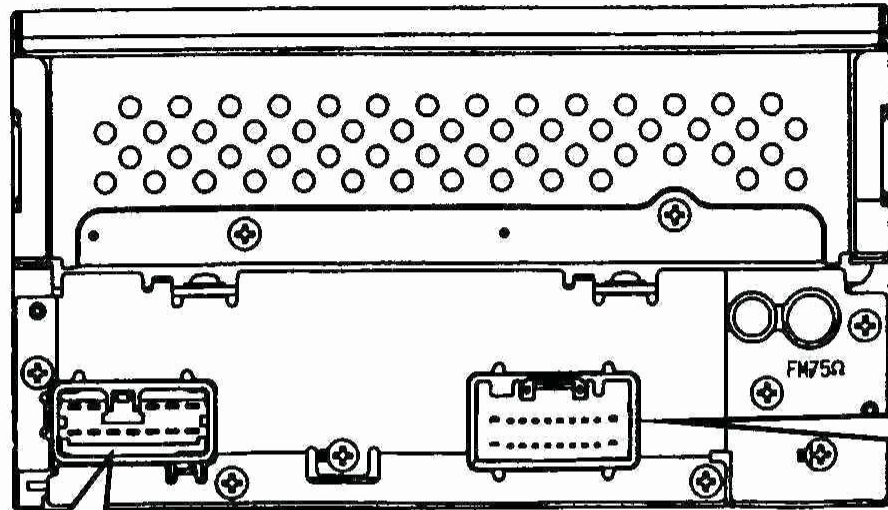


<CN702 12P CONNECTOR>



- |                     |                          |
|---------------------|--------------------------|
| 1. Audio Right (+)  | 7. Audio Left (-)        |
| 2. Audio Left (+)   | 8. Ground                |
| 3. Signal Ground    | 9. Communication TX (-)  |
| 4. Mute             | 10. Communication TX (+) |
| 5. Power Supply, +B | 11.                      |
| 6. Audio Right (-)  | 12. Power Supply, ACC    |

## REAR VIEW AND CONNECTORS

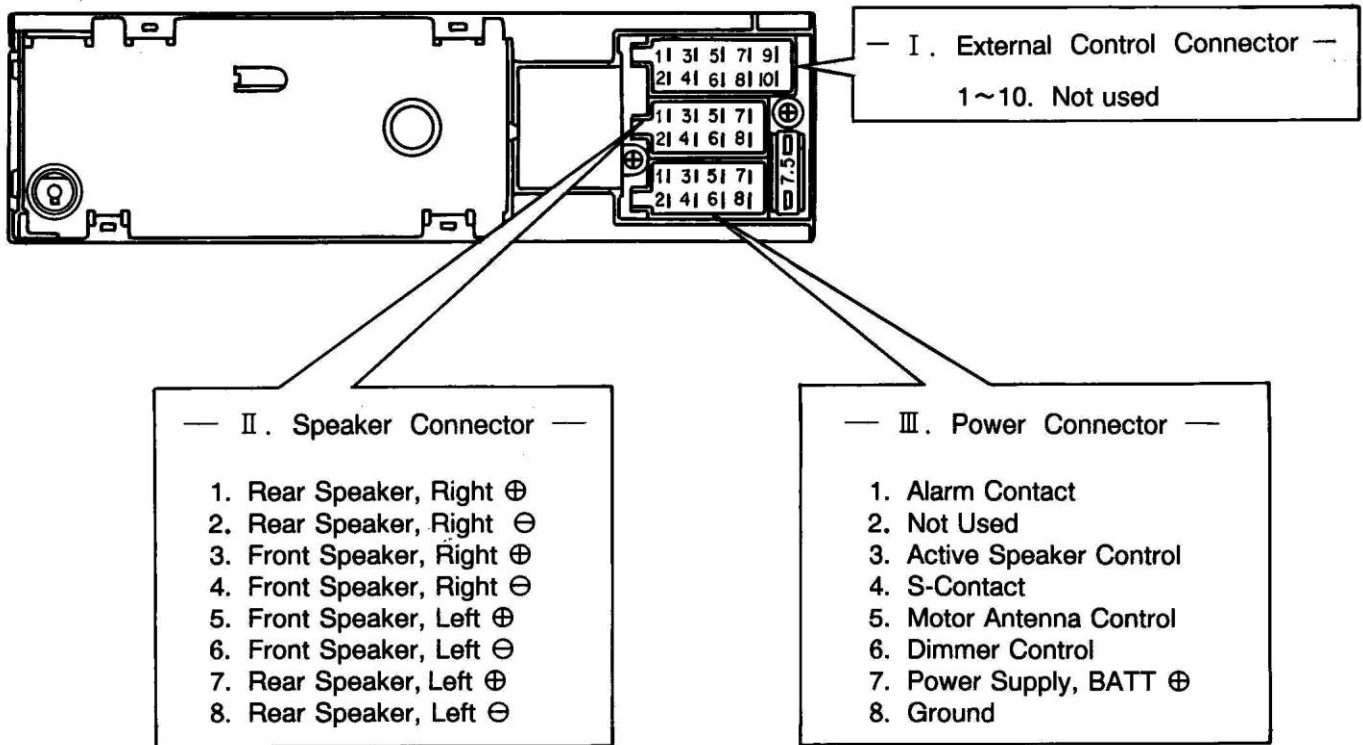

Components	
Car Radio Battery Constant 12V+ Wire	
Car Radio Accessory Switched 12V+ Wire	
Car Radio Ground Wire	
Car Radio Illumination Wire	
Car Radio Antenna Trigger Wire	
Car Audio Front Tweeter Size	
Car Audio Front Tweeter Depth	
Left Front Speaker Positive Wire (+)	
Left Front Speaker Negative Wire (-)	
Right Front Speaker Positive Wire (+)	
Right Front Speaker Negative Wire (-)	
Car Audio Front Speakers Size	6
Car Audio Front Speakers Depth	
Left Rear Speaker Positive Wire (+)	
Left Rear Speaker Negative Wire (-)	
Right Rear Speaker Positive Wire (+)	
Right Rear Speaker Negative Wire (-)	
Car Audio Rear Speakers Size	6



